


- TM Commerce 4 mm and 5 mm
- TM Technic 7 mm and
- TM Strong 9 mm

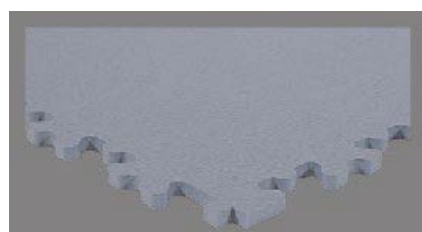

Textured

Size 503 x 503

Thickness

EN 438 – 4, 5, 7 & 9 mm

Weight

4 mm – 6.4 kg / m²

5 mm – 7 kg / m²

7 mm – 9.21 kg / m²

9 mm – 12.8 kg / m²

Tiles per Box

m² per Box

4 mm Qty 12 3 m²

5 mm Qty 10 2.5 m²

7 mm Qty 8 2 m²

9 mm Qty 6 1.5 m²



Studded

Size 503 x 503

Thickness

EN 438 – 5 & 7 mm

Weight

5 mm – 7 kg / m²

7 mm – 9.21 kg / m²

Tiles per Box

m² per Box

5 mm Qty 10 2.5 m²

7 mm Qty 8 2 m²



Chequer

Size 503 x 503

Thickness

EN 438 – 4, 5 & 7 mm

Weight

4 mm – 6.4 kg / m²

Tiles per Box

m² per Box

5 mm Qty 10 2.5 m²

7 mm Qty 8 2 m²

CLASSIFICATION		
Norm / Product specification	–	EN ISO 10581
European Classification	EN ISO 10874	34 / 43
Fire Class	EN 13 501-1	Bfl-s1
Static Electrical Propensity	EN 1815	2 kV
Slip Resistance	EN 16165 app. B DIN 51130	R10
PERFORMANCE		
Wear Resistance	EN 660.2	< 2.0 mm ³
Wear Group	–	T Group
Dimensional Stability	EN ISO 23999	≤ 0.25%
Dimensional Stability(average measured value)	–	≤ 0.10%
Residual indentation	EN ISO 24343-1	0.1 mm
Castor Chair Test (type W)	ISO 4918	Ok
Colour Fastness	EN 20 105 - B02	Ok
Chemical Products Resistance	EN ISO 26987	Ok
Flexibility	ISO 24344 Method A	No Cracking
Shore Hardness	EN ISO 868	> 40 HD
Type Binder Content	ISO 10581	I Group
Thermal Conductivity	ISO 8302	0.25 W / (m.K)
ENVIRONMENTAL ACCREDITATIONS		
TVOC after 28 days	ISO 16000-6	< 100 µg / m ³
Certification	–	Floorscore®
CE MARKING		
CE	EN 14041	